DS-KD-K12/S
Nametag module



- Nametag module of modular door station
- 12 nametag buttons calling design for easier calls
- IP65 protection level
- Backlight compensation behind the nametag buttons
- Stainless steel high quality material
- Easy to use and extend


▪ Specification

System parameters	
Operation system	Linux
ROM	/
RAM	/
Processor	Embedded high performance processor
Device interfaces	
RS-485	1
General	
Button	12 physical buttons
Power consumption	≤ 2 W
Indicator	/
Weight	Net weight: 179 g; Gross weight: 336.4 g
Protective level	IP65
Working temperature	-30 °C to 55 °C
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	98.2 mm × 100.2 mm × 33.7 mm (3.87" × 3.95" × 1.33")
Installation	Flush mounting, surface mounting

▪ Available Model

DS-KD-K12/S

▪ Dimension

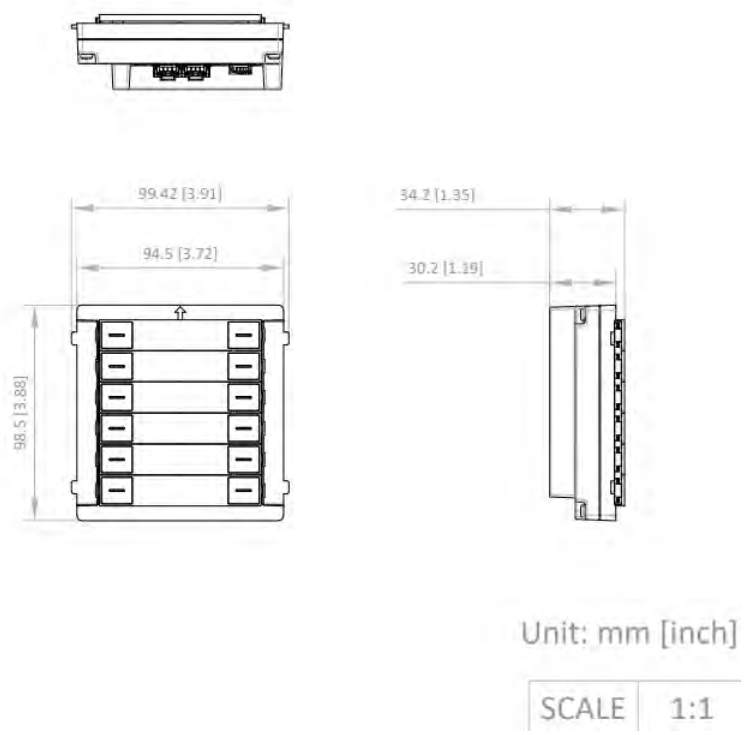

▪ Accessory

▪ Optional

DS-KD8003-IME1(B) KD8 Series Modular Door Station	DS-KD8003-IME1(B)/S KD8 Series Pro Modular Door Station	DS-KD8003-IME1(B)/NS KD8 Series Pro Modular Door Station	DS-KD8003-IME1(B)/Flush KD8 Series Pro Modular Door Station	DS-KD8003-IME1(B)/Surface KD8 Series Pro Modular Door Station
				

DS-KD7003EY-IME2 2-wire HD Door Station	DS-KD7003EY-IME2/Aluminum 2-wire HD Door Station
	

Headquarters
No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com

Follow us on social media to get the latest product and solution information.

Hikvision HikvisionHQ HikvisionHQ Hikvision_Global Hikvision Corporate Channel hikvisionhq

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.