DS-KAW92-4N
2-Wire HD DIN Rail Power Supply Unit



- 92W DIN Rail power unit
- 48V output


▪ Specification

General	
Working temperature	Operating: -10 °C to 70 °C (14 °F to 158 °F) Storage: -25 °C to 85 °C (-13 °F to 185 °F)
Working humidity	< 95% (no-condensing)
Cooling system	Convection
Dimension (L x W x D)	70 mm × 90 mm × 58.4 mm
Power supply	100 VAC to 240 VAC
Power consumption	92 W

▪ Available Model

DS-KAW92-4N

▪ Dimension

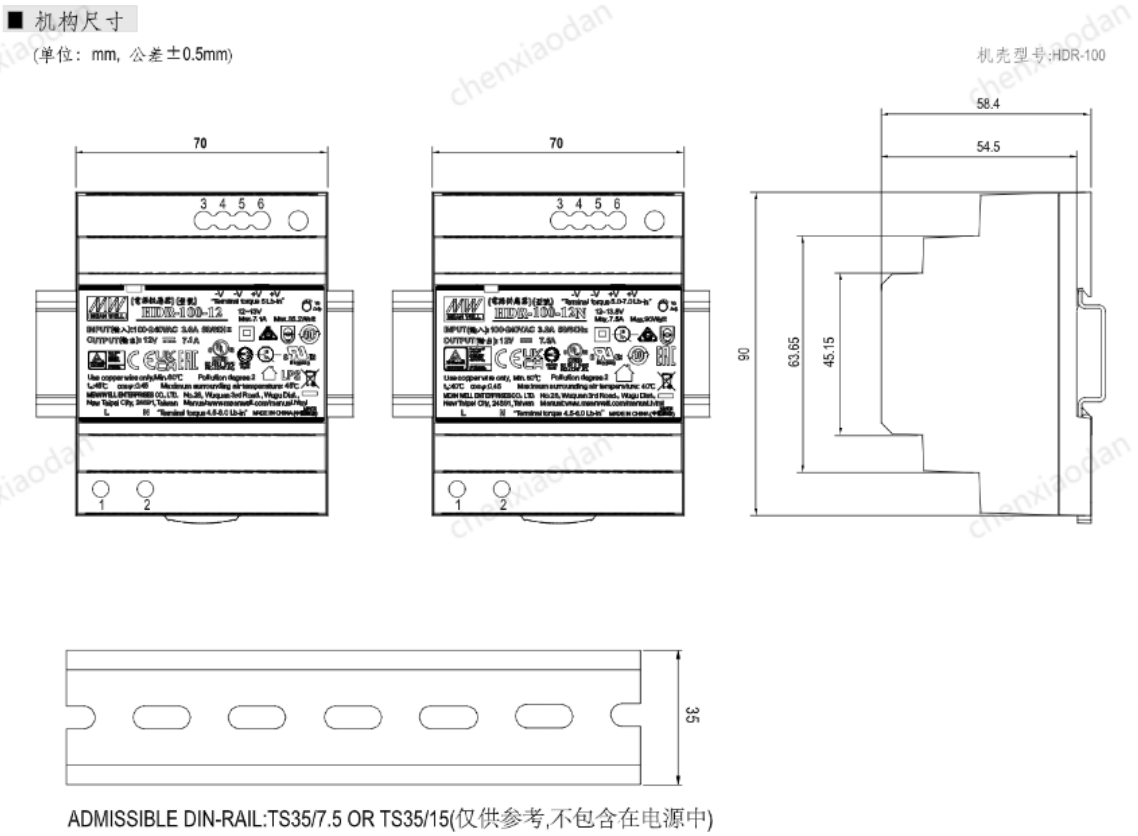

ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15(仅供参考,不包含在电源中)

端子Pin脚定义

Pin脚编号	Pin脚功能	Pin脚编号	Pin脚功能
1	AC/L	3,4	-V
2	AC/N	5,6	+V

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION