DS-3T1512HP-SI-8P4F
Smart Gigabit Industrial PoE



Smart managed switches are developed by Hikvision, featuring easy management and maintenance. You can easily deploy, monitor and expand your security system anytime and anywhere with our software platforms. You can view the network topology, monitor the health of the network and receive device alarms in real time, which greatly reduces the cost of network operation and maintenance.

- 8 x Gigabit PoE RJ45 ports,4 x Gigabit SFP fiber optical ports
- Support 802.1Q VLAN
- Support 802.3bt Hi-PoE, Max. 90W for one port
- Support STP/RSTP/ERPS Loop prevention, storm control
- Support cable detection to locate failure
- Support SNMP, QoS, DHCP snooping
- 6 kV Surge Protection
- Wider Temperature (-40 °C to 75 °C) Design
- Up to 300 m Long-range Transmission

▪ Specification

General	
Shell	Metal material, IP40
Net Weight	0.84 kg (1.85 lb)
Gross Weight	1.16 kg (2.56 lb)
Dimensions (W × H × D)	155.00 mm × 46.00 mm × 130.00 mm (6.10'' × 1.81'' × 5.12'')
Operating Temperature	-40 °C to 75 °C (-40 °F to 167 °F)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Operating Humidity	5% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	48~57 V DC, 7.5 A 52 V~57 V recommended input voltage to ensure stable power supply. Support dual power inputs and hot backup.
Installation Mode	Desk-Mounted,Rail
Max. Power Consumption	307 W
Power Consumption in Idle	7 W
Surge Protection	6 kV
Network Parameters	
Ports	8 × Gigabit PoE port,4 × Gigabit fiber optical port
MAC Address Table	8 K
Switching Capacity	Whole-Device Performance: 56 Gbps Port Performance: 24 Gbps
Packet Forwarding Rate	Whole-Device Performance: 41.66 Mpps Port Performance: 17.86 Mpps
Internal Cache	4.1 Mbits
PoE Power Supply	
PoE Standard	Ports 1 to 4: IEEE 802.3af, IEEE 802.3at, IEEE 802.3bt Ports 5 to 8: IEEE 802.3af, IEEE 802.3at
PoE Power Pin	Ports 1 to 4: 8-pin power: 1/2(-), 3/6(+), 4/5(+), 7/8(-) Ports 5 to 8: End-span: 1/2(-), 3/6(+)
Max. Port Power	Ports 1 to 4: 90 W Ports 5 to 8: 30 W
PoE Port	Hi-PoE: Ports 1 to 4 PoE: Ports 5 to 8
PoE Power Budget	300 W
Software Function	
Long Range	Ports 1 to 8: up to 300 m. Long range performance may vary depend on camera model or cable condition.
Port Isolation	Ports 1 to 8: port isolation mode to improve network security Ports in an isolation group cannot communicate with each other, but they can communicate with ports outside the isolation group.
PoE Watchdog	Ports 1 to 8: auto detect and restart the cameras that do not respond.
Link Aggregation	Link aggregation is used to aggregate multiple physical ports to form a logical port for load balancing, bandwidth expansion, and port protection. Support static link aggregation. Support 8 aggregation groups.

Loop Prevention	Loop prevention is used to prevent the switching network from forming loops, which will seriously affect network communication. Disabled by default. Support 802.1D STP. Support 802.1w RSTP. Support G.8032 ERPS.
QoS	QoS is used to allocate bandwidth to different services so as to provide end-to-end service quality assurance. Support port-based priority configuration. Support SP, WRR priority schedule mode.
VLAN	VLAN is used for network scale planning and network health improvement. Support 802.1Q. Configurable VLAN ID from 1-4094. Support Trunk, Access port mode. Support Max. 4094 VLAN.
HPP	Support one-click activation and remote management via Hik-Partner Pro. Functions supported: 1. Display the port rate. 2. Display the port bandwidth utilization rate. 3. Display the PoE power usage. 4. Display topology information. 5. Display the alarm status. 6. Restart ports and devices. 7. Enable port long-rage mode. 8. Remotely upgrade the device.
System Maintenance	Support device management via web. Support DHCP Client. Enabled by default for dynamic assignment of management IP addresses. Support Super IP, which is a fixed IP address (10.180.190.200) for direct access. Support management via Hik-Central Pro. Support remote management via Hik-Partner Pro. Support cable detection. Abnormal open circuits and short circuits as well as network cable length can be detected. Supports 802.1ab LLDP for peer device discovery. Support SNMP v1/v2c for third-party management platform access. Support port mirroring for fault locating.
Port Rate-Limiting	Port rate-limiting is used for port bandwidth adjustment to prevent network congestion.
Storm Control	Storm control is used to prevent switch ports from being blocked by broadcast or multicast storms in the LAN, which may affect network communication. Support port rate limiting based on broadcast, multicast, and unknown unicast packets.
DHCP Snooping	DHCP Snooping can prevent unauthorized connections to DHCP servers from disrupting the network and affecting normal network communication, and only allow DHCP packets from trusted ports to pass through. Disabled by default.
ACL	Port security strategy. Support up to 64 ACL entries. Support up to 128 configuration rules under all ACL entries.

IPSG	IPSG can control the security of port access device. Support port, MAC, IP binding. Support 256 security entries.
Approval	
EMC	CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020),IC (ICES-003: Issue 7:2020),RCM (AS/NZS CISPR 32: 2015)
Safety	CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition)), CE-LVD (EN 62368-1: 2014+A11: 2017)
Chemistry	CE-RoHS (2011/65/EU),WEEE (2012/19/EU),Reach (Regulation (EC) No.1907/2006)

▪ Available Model

DS-3T1512HP-SI-8P4F


DS-3T1512HP-SI-8P4FKIT(75W)

DS-3T1512HP-SI-8P4FKIT(240W)

▪ Key Component


Order Sap	Order Model	Type	Parameter
303703680	NDR-75-48	Industrial Power Supply	AC/DC Power Supply, Output 48V-55V, 0-1.6A, 75watts, Input 90-264VAC, 127-370VDC, DIN rail, -20~70°C
303703681	NDR-240-48	Industrial Power Supply	AC/DC Power Supply, Output 48V-55V, 0-5A,240watts, Input 90-264VAC, 127-370VDC, DIN rail, -20~70°C
303703682	NDR-480-48	Industrial Power Supply	AC/DC Power Supply, Output 48V-55V, 0-10A, 480watts, Input 90-264VAC, 127-370VDC, DIN rail, -20~70°C
301803726	DS-3T1512HP-SI-8P4F(O-STD)KIT(75W)	Industrial PoE Switch KIT	Switch x 1, Model: DS-3T1512HP-SI-8P4F， 75 watts Power Supply Unit x1, Model: NDR-75-48
301803727	DS-3T1512HP-SI-8P4F(O-STD)KIT(240W)	Industrial PoE Switch KIT	Switch x 1, Model: DS-3T1512HP-SI-8P4F， 240 watts Power Supply Unit x1, Model: NDR-240-48

▪ Typical Application

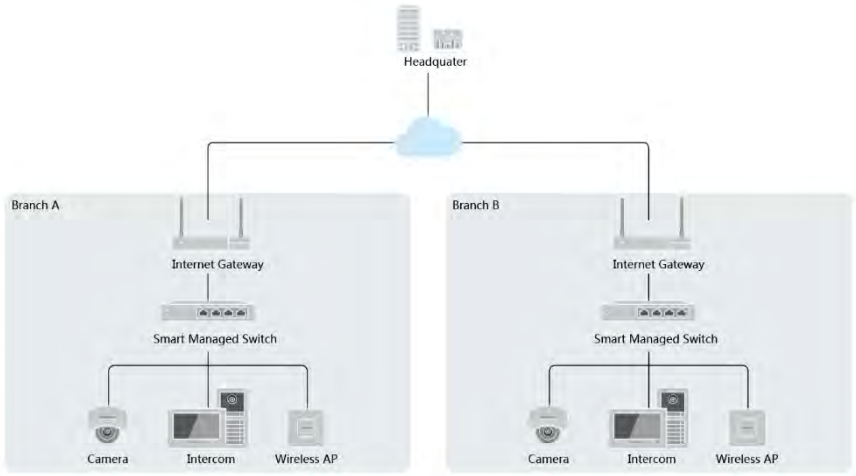


▪ Physical Interface

Front Panel

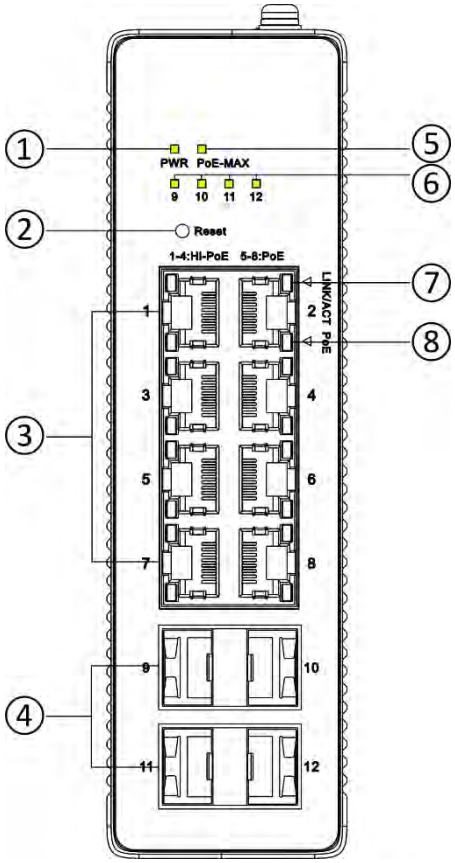


Rear Panel

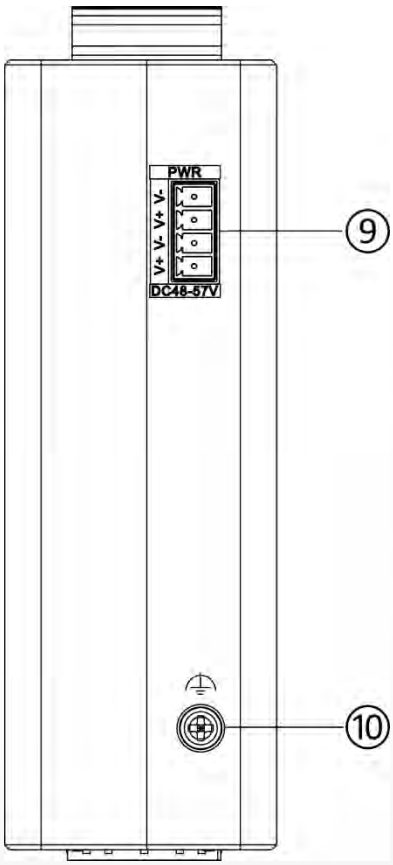

No.	Indicator/ Port	Description
①	PWR Indicator	● Solid on: The switch is powered on normally. ● Unlit: No power supply connected or power supply is abnormal.
②	Reset Button	Press and hold the reset button for about five seconds to restore all the configurations of the switch to default settings.
③	Gigabit PoE RJ45 Port	Used for connection to a powered device (PD) via a network cable. Note: Ports 1 to 4 of DS-3T1512HP-SI-8P4F are Hi-PoE RJ45 ports, which can be connected to high-power devices.
④	Gigabit SFP Fiber Optical Port	Used for connection to another device via an optical fiber when plugged into with an optical module.
⑤	PoE-MAX Indicator	● Solid on/Flashing: The output power of the switch is about to reach or has reached the upper limit. The power supply may be abnormal if more devices are connected. ● Unlit: The switch does not supply power to a PD, or supplies power to a PD normally and its output power does not reach the upper limit. Note: The PoE-MAX indicator will be unlit in 5 seconds after the output power of the switch returns to normal.
⑥	Gigabit SFP Fiber Optical Port Indicator	● Solid on: The gigabit SFP fiber optical port is connected. ● Flashing: The gigabit SFP fiber optical port is transmitting data. ● Unlit: The gigabit SFP fiber optical port is disconnected or connection is abnormal.
⑦	LINK/ACT Indicator	● Solid on: The port is connected. ● Flashing: The port is transmitting data. ● Unlit: The port is disconnected or connection is abnormal.
⑧	PoE Indicator	● Solid on: The switch provides power supply to a PD normally. ● Unlit: The switch is disconnected to a PD, or provides power supply to a PD abnormally.
⑨	Power Supply	Use a self-prepared power adapter or power cord to connect the switch to a power socket.
⑩	Grounding Terminal	Used for connection to a grounding cable to protect the switch from lightning.

▪ Dimension

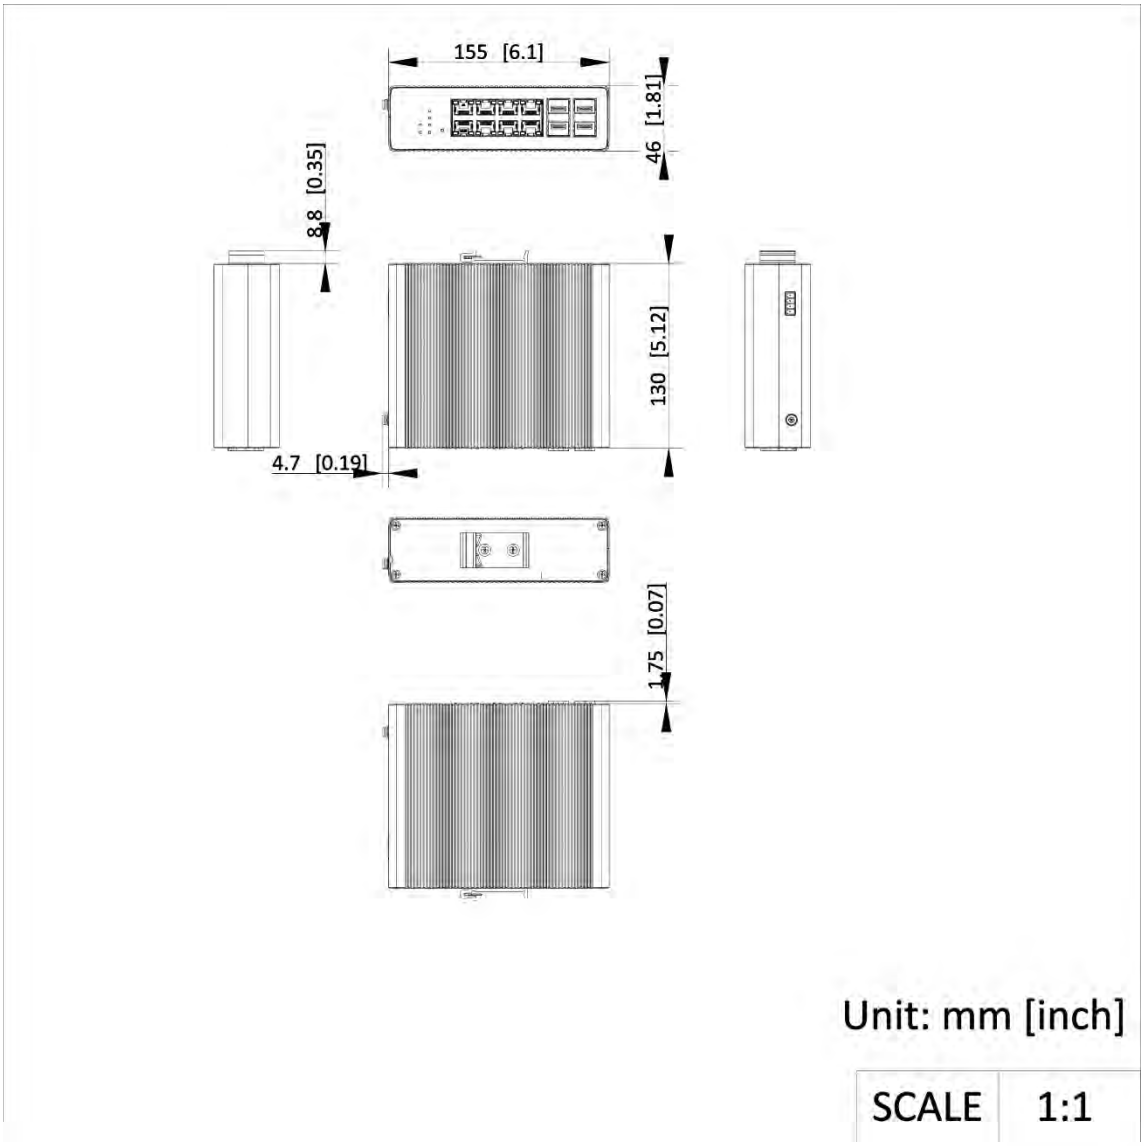

▪ Accessory

▪ Optional

NDR-75-48	NDR-240-48	NDR-480-48
		

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION